


You Can Fix It Yourself

Version 4
NEWLY
REVISED
October 2007

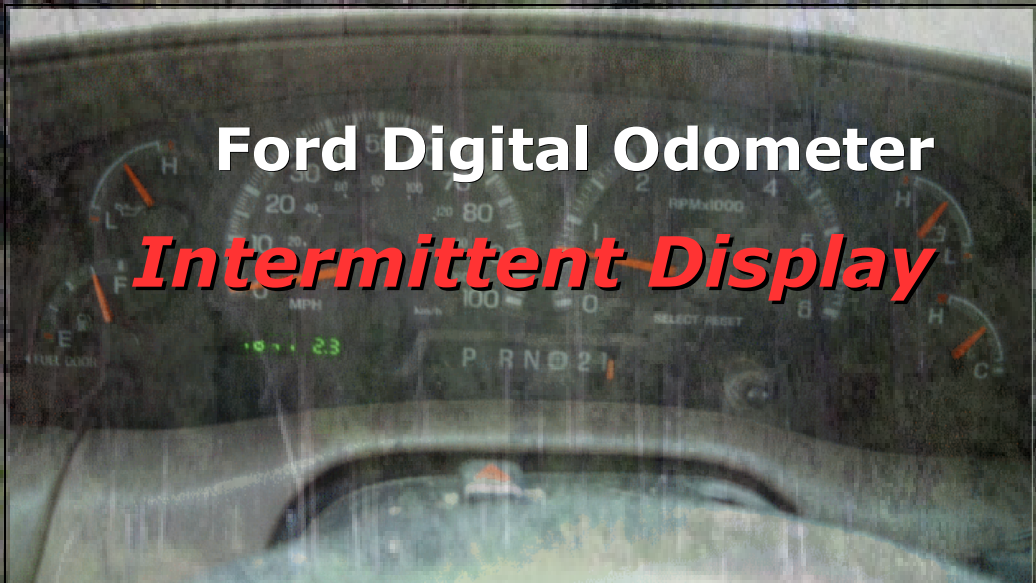

1999 - 2003 F-Series Pickups
&
Sport Utility Vehicles

HES Enterprises
1597 River Road
Kingston, TN 37763 USA
www.odometer-repair.com

info@odometer-repair.com

© HES Enterprises 2007

Version 4 October 2007

Printed in the USA

All rights reserved. No part of this book may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording or by any information storage or retrieval system, without permission in writing from the copyright holder.

Disclaimer:

The procedures in this manual are not intended to repair any problem except for the intermittent odometer problem specifically addressed herein. While every effort has been made to ensure the accuracy of the information in this manual, no liability can be accepted by the author for loss, damage or injury caused by errors or omissions in the information provided. User assumes all responsibility for personal injuries or property damages resulting from attempting the repairs detailed in this publication. Neither HES Enterprises nor any individual associated with HES Enterprises are affiliated with Ford Motor Company.

Table of Contents

About this Manual.....	5
Acknowledgments.....	5
Purpose of the Manual.....	5
You Can Fix it Yourself!.....	8
Section 1. My Odometer is a Part-Time Worker!.....	11
Symptoms.....	12
Is the Odometer Defective?.....	14
Just a Minor Inconvenience?.....	14
Section 2. Options for Repairing the Odometer.....	17
1.Dealership Replacement of Instrument Cluster.....	17
2.Odometer Repair Shops.....	17
3.Replace with a Used Instrument Cluster.....	18
4.Repair it Yourself.....	19
Section 3. Understanding the Cause of the Intermittent Odometer Problem.....	20
Your Odometer's Display and Electronic "Brains" are Not Defective.....	20
The Real Cause of the Problem.....	21
Section 4. Passive Anti Theft System (PATS).....	22
Section 5. Instrument Cluster Removal.....	24
Overview.....	24
Cluster Removal Procedures.....	25
1.Disconnect the Negative (-) Battery Cable from Battery.....	25
2.Disconnect the Positive (+) Battery Cable from Battery.....	25
3.Wait at Least Two Minutes Before Proceeding.....	25
4.Remove the Headlamp Switch	26
5.Remove the Instrument Cluster Finish Panel.....	33
6.Remove the Instrument Cluster.....	35
Section 6. Instrument Cluster Repair Procedure.....	41
Overview.....	41
Preparation.....	41
Locating the Faulty Circuit Board.....	43
Locating the Defective Solder Joints.....	46
Repairing the Defective Solder Joints.....	50
Cleaning the Repair Area.....	52
Reassemble Instrument Cluster and Install in Vehicle.....	53
Test the Odometer in the Vehicle.....	53

Illustration Index

Illustration 1: One of Many Unpredictable Odometer Behaviors.....	14
Illustration 2: Broken Speedometer Dust Cover (caused by excessive thumping).....	15
Illustration 3: Headlight Switch Module.....	24
Illustration 4: Center Trim Panel (Bezel).....	24

Illustration 5: Instrument Cluster Trim Panel.....	24
Illustration 6: Bottom of the knob.....	25
Illustration 7: Use a Small Tool	27
Illustration 8: Hole Just Inside the Outer Hole.....	27
Illustration 9: Knob Installed Upside Down.....	27
Illustration 10: Knob Upside Down and Turned to	28
Illustration 11: Release the Module.....	28
Illustration 12: Remove Wire Bundles.....	28
Illustration 13: Guide Channels on Bottom of Plugs	28
Illustration 14: Headlight Switch Module	29
Illustration 15: Center Trim Panel (Bezel).....	30
Illustration 16: Back Side of Center Trim Panel with Attaching Clips.....	30
Illustration 17: Remove Center Trim	30
Illustration 18: Center Trim (Bezel) after Release of Clips.....	31
Illustration 19: Rotate Panel ¼ Turn to the Left to Remove.....	31
Illustration 20: Bolt Behind Headlight Switch.....	32
Illustration 21: Three Bolts above Instrument Cluster.....	32
Illustration 22: One Bolt on Left Side of Steering Column.....	32
Illustration 23: Two Bolts on Right Side of Steering Column.....	32
Illustration 24: Ensure Trim Panel is Detached from Vehicle all the way Around.....	33
Illustration 25: Remove Panel.....	33
Illustration 26: Guide Pin on Right Side of Steering Column.....	34
Illustration 27: Four Bolts Support the Instrument Cluster	35
Illustration 28: Soft Cloth over Steering Column to Prevent Damage.....	35
Illustration 29: PRNDL Indicator	36
Illustration 30: Front of Instrument Cluster.....	38
Illustration 31: Back of Instrument Cluster.....	38
Illustration 32: Remove Cluster.....	38
Illustration 33: Cables and PRNDL Indicator after Removing Instrument Cluster.....	39
Illustration 34: Back of Instrument Cluster.....	43
Illustration 35: View of Cluster with White Cover Removed.....	43
Illustration 36: Connector with Cable Attached.....	44
Illustration 37: Connector with Cable Removed.....	44
Illustration 38: Circuit Board Removed	45
Illustration 39: Location of Defect.....	46
Illustration 40: Pin Layout Pattern.....	46
Illustration 41: Back Side of Circuit Board.....	48
Illustration 42: Locate the Defect.....	48
Illustration 43: You May Only Need to do this.....	50
Illustration 44: Example of Proper Repair.....	52

With the easy step-by-step procedures in this manual, you can have your digital odometer performing like new within a couple of hours. You will also have the satisfaction of knowing you saved hundreds of dollars in repair bills.

Are you ready to stop beating up your dash and **REALLY** fix that crazy mixed-up intermittent odometer once and for all? All you need is a copy of our illustrated step-by-step repair manual with simple procedures that will let you easily repair your intermittent odometer at no cost. Grab your copy of the Ford [Intermittent Odometer Repair Manual](#) while it is still available. This is the **ONLY** repair manual available for the [intermittent odometer problem](#) and it is **available ONLY from [this location](#)**.

Please send comments or questions to info@odometer-repair.com.